




french**sound**design

www.silveracoustic.com

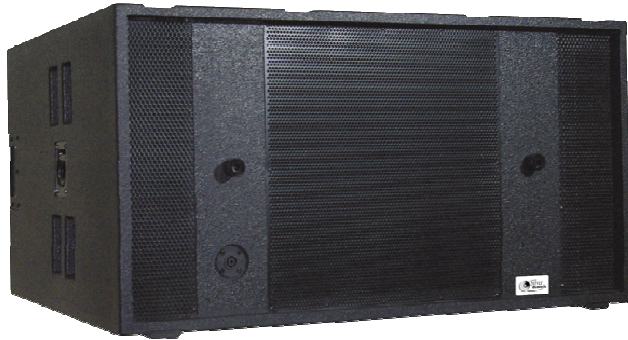

MiniMaX Series

MMX 218S

- Ultra compact size
- Neodymium loudspeaker 4" voice coil with air forced cooled
- High power handling
- Made in France

Technical data

LF : 2 x 18" (4" voice coil)
Efficiency : 101 dB / 1W / 1m
SPL Max : 135 dB
Power handling : 2500 W RMS
Frequency response : 30 Hz – 125 Hz
Impedance : 4Ω
Amplifier recommended :
 FP 10000Q or T4N
Directivity : semi directionnel

The MMX 218S is a high power sub bass cabinet specially designed to be the perfect companion of MMX 6L ou 18L MiniMaX series in extending the usable range down to 30 Hz.

It consist of 2x18" neodymium loudspeaker (4" voice coil), in a vented design couple to a tapped horn mounting, who gives to this bass cabinet a perfect control of directivity.

with a HK bar, which will allow you to have a ultra compact yet powerful system for various applications.

The touring package (front dolly panel + protection cover), who protect the front, coupled with the rear handle enables transportation and handling easy.

The high-quality enclosure is constructed from (21 mm) birch plywood with a black finish.

Dimensions

Height : 530 mm / 20.86 in
Width : 990 mm / 38.97 in
Depth : 850 mm / 33.46 in
Weight : 80 Kg / 176.37 lbs


The 18" used benefit Forced air convection circuit in order to deliver a coherent sub bass output from 30 to 125 Hz.

The recommendation is 1 MMX 218S for 6 MMX 6L or 18L plus 2 MMX 212B

Associated products

MMX 6L: Vertical directivity 6°
MMX 18L: Vertical directivity 18°
MMX 45L: Vertical directivity 54°
MMX 212B: Bass cabinet 2 x 12"
MMX 218RP: Trolley

To make the MMX 218S most versatile possible, a stand socket (C36) is integrated on top. It will help the rapid implementation of 1 MMX 218S in combination with 3 MMX 6L (18L) or 1 MMX 45L mounted lyre (option)

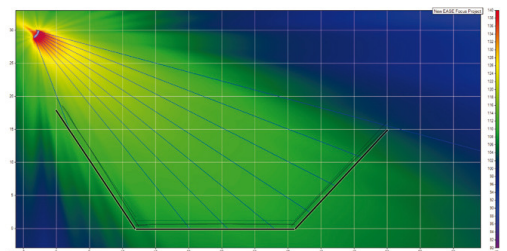

SILVER ACOUSTIC - ZI - 250, rue de la Marbrerie - 34740 Vendargues, France


www.silveracoustic.com - info@silveracoustic.com




french**sound**design

www.silveracoustic.com


MMX 218S Frequency Response

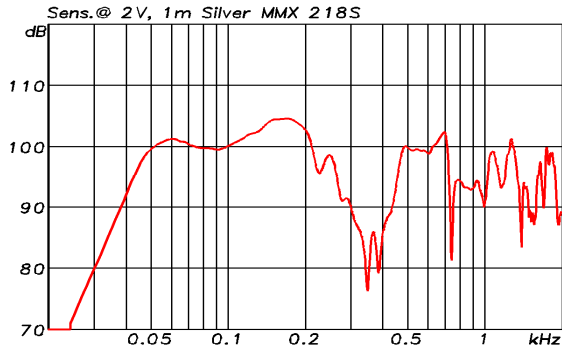



MMX 218S Impedance Curve

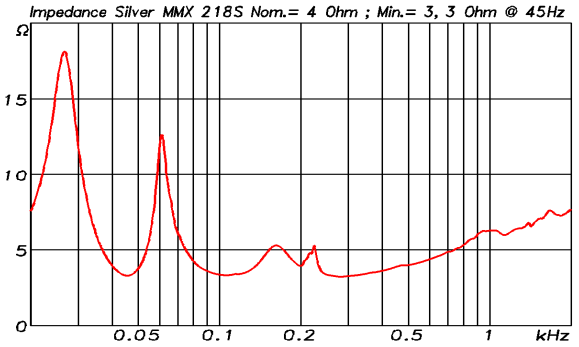

MMX 218S INPUT PANEL

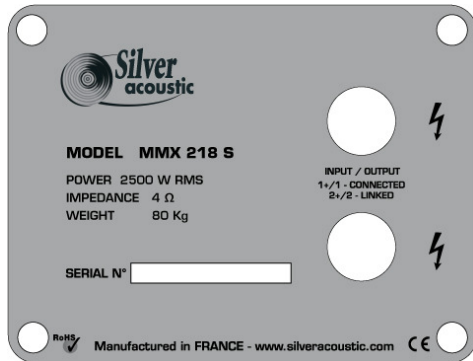

MMX 218S SPL MAX

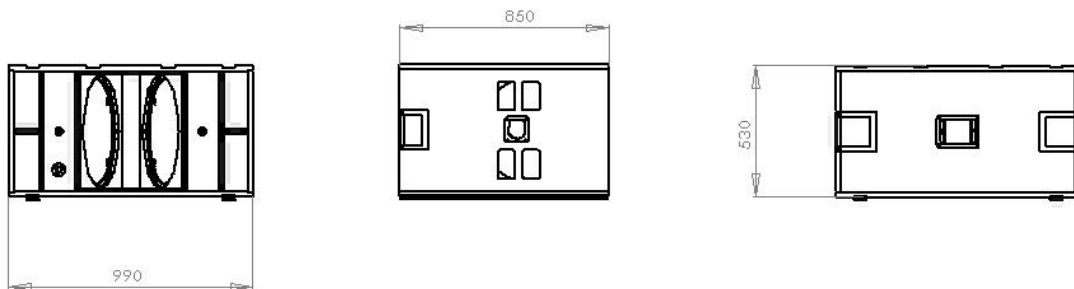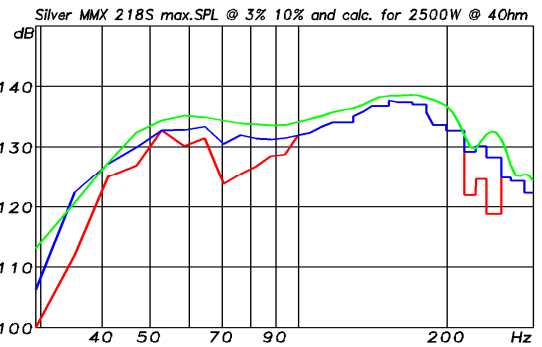

SILVER ACOUSTIC - ZI - 250, rue de la Marbrerie - 34740 Vendargues, France

www.silveracoustic.com - info@silveracoustic.com